NOMATEC® RDS

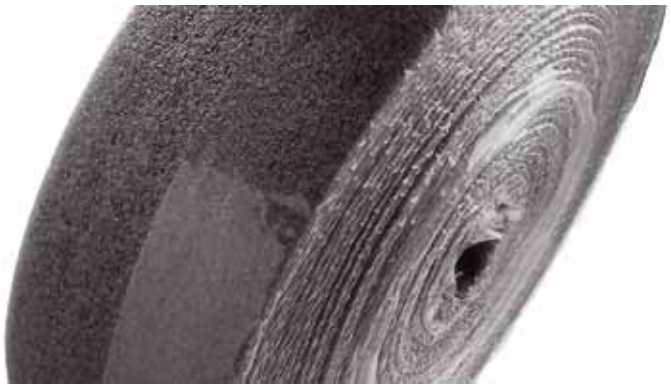

NOMATEC® RDS are edge expansion joints, in closed cell PE foam, for cement floor and floor heating systems.

- Extremly flexible
- Available with or without PE foil
- Preslit and perforated system to enable easy tearing of the overlapping piece

Product features

- Closed cell PE-LD foam
- Density 18 kg/m^3 ± 5 kg/m^3
- Fire class: E according to DIN EN 13501-1: 2010
- Supplied as rolls

Certificate of approval
no 953115
LLOYD'S REGISTER QUALITY ASSURANCE
ISO9001
NMC sa
Gent-Noël-Straße
B-4731 Eynatten

www.nmc.eu

For further information, please contact
the respective subsidiary in your country.
Visit **www.nmc.eu/contact**

nmc

NOMATEC® RDS

- Specially designed for wall, corner or door edges
- FSR = RDS with PE foil and tear-off perforation
- FSRS = RDS with PE foil, tear-off perforation and adhesive
- Colour: grey

Type	Thickness mm	Width foam mm	Width PE-foil mm	Density	Length / Roll	Packaging unit / Bag	Item code
8*150/25m FSR	8 +1/-1	150 +5/-5	170	18 kg/m³ ±5 kg m³	25 m	4 x 25 m	3000198 (CPSJS0801)
8*180/25m FSR	8 +1/-1	180 +5/-5	170	18 kg/m³ ±5 kg m³	25 m	4 x 25 m	3006780 (CPSJS0806)
8*150/25m FSRS	8 +1/-1	150 +5/-5	170	18 kg/m³ ±5 kg m³	25 m	4 x 25 m	3000199 (CPSJS0807)

Complementary Products

NOMATEC® Backer Rod Hollow & Full

NOMATEC® Backer Rod Hollow & Full round profiles are manufactured from closed-cell polyethylene foam and are used as backing material for elastomeric and other cold-applied sealants.
They are inserted into a joint to control the sealant depth and act as bond-breakers, without adhering to the sealant.

NOMATEC® Roof Seal

NOMATEC® Roof Seal are self adhesive profiles with open cell PE foam specially designed to seal the roof area. Thanks to their unique cut profile, they adapt themselves to nearly every roof shape and reliably fill gaps and fugues.

05-2014 NMC sa / 2014 responsible publisher: NMC sa, Gert-Noël-Straße, B-4731 Eynatten