

# NOMA<sup>®</sup> PROTECT

**TEMPORARY  
BUILDING SITE  
PROTECTION**

**100 %**  
RECYCLABLE  
—  
CONTAINS  
RECYCLED  
MATERIAL

**nmc**

SOLUTIONS  
FOR INDUSTRIES

An aerial perspective of a building site. In the foreground, a road with a white car and a pedestrian. To the left, a modern house with a red roof and a carport. In the center, a blue swimming pool. To the right, a large building under construction with a glass and brick facade. In the background, a railway line with a train and a tunnel entrance. The text "BUILDING SITE DAMAGE? COMPLETELY UNNECESSARY!" is overlaid in the center.

**BUILDING SITE DAMAGE?  
COMPLETELY UNNECESSARY!**



Scratches on door frames or stair rails, chipped tiles, dents in lift cages... Such unnecessary damage is caused by carelessness, whether on a new-build site or when doing refurbishment work in lived-in homes. And the resultant problems are quick to follow: angry clients, construction delays... and possibly even claims for damages.

But none of this is necessary! NMC has developed temporary protection foams – profiles made of resistant polyethylene able to efficiently absorb bumps, thereby protecting fittings such as stair rails, door and window frames and other vulnerable construction features. Applied to scaffolding, they reduce the danger of people getting injured.

NMC is a leading international company producing synthetic foams used in the automotive sector, as protective profiles in the logistics sector, as well as in the construction industry.

# **TEMPORARY STAIRS AND STAIR RAIL PROTECTION**

Practical, easily and quickly installed NOMAPACK® U- and O- profiles in various sizes completely cover handrails, stair-posts, rungs and crossbars, absorbing shocks caused by falling objects, bumps and scratches and thereby protecting the fittings from unnecessary damage.

## **NOMAPACK® FEP:**

Versatile protective profile with a particularly large internal diameter.

## **NOMAPACK® U:**

The NOMAPACK® U-range consists of effective protection profiles for edges and curves of all types. Thanks to the various dimensions and thicknesses you'll always find suitable protection for stairs and stair rails at your construction site.

## **NOMA®PROTECT TPRO:**

NOMA®PROTECT TEMPORARY PROTECTION 114 x 13/2 m is a solution specially designed to protect larger stair posts and door frames during construction, renovation or home-moving. Thanks to its flexibility, this pre-slit profile can be easily fixed.



# NOMAPACK® O PRESLIT

The pre-slit profile for round bodies. Other dimensions are available on request.

LENGTH 2.000 mm  $\pm$ 30 mm

MATERIAL Grey PE-LD Foam – Recyclable



Type	A mm	B mm	m/	Item Code
18-9	19 $\pm$ 3	9 $\pm$ 1,5	330	3001041
76-13	78 $\pm$ 4	13 $\pm$ 2	40	3001062
m <sup>3</sup> / = 0,50     2040 * 590 * 390 mm				

# NOMAPACK® U TULIP

The „original“, proven and reliable profile.

LENGTH 2.000 mm  $\pm$ 30 mm

MATERIAL Blue PE-LD Foam – Recyclable




Type	A mm	B mm	C mm	D mm	m/	Item Code
5-15	16 $\pm$ 2	7 $\pm$ 1	3 $\pm$ 3	29 $\pm$ 2	560	3002243
m <sup>3</sup> / = 0,50     2040 * 590 * 390 mm						

# NOMAPACK® U FEP

The versatile protective profile with a particularly large internal diameter.

**LENGTH** 2.000 mm  $\pm 30$  mm

**MATERIAL** Blue PE-LD Foam – Recyclable




Type	A mm	B mm	C mm	D mm	m/	Item Code
FEP	65 $\pm 5$	9 $\pm 1$	5 $\pm 5$	65 $\pm 5$	120	3002245
m <sup>3</sup> / = 0,50  2040 * 590 * 390 mm						

# TEMPORARY PROTECTION

The easy to fix protection for door and window frames, delivered as pre-slit profile.

**LENGTH** 2.000 mm  $\pm 30$  mm

**MATERIAL** Red PE-LD Foam – Recyclable



Type	A mm	B mm	m/	Item Code
114 x 13	114 $+6/-0$	13 $\pm 1$	22	3003074
m <sup>3</sup> / = 0,50  2040 * 590 * 390 mm				



# TEMPORARY DOOR PROTECTION

The pre-slit profiles adapt to nearly all door frames, protecting them from scratches and costly repairs. Particularly suitable on building sites or when moving house. Installed at the turn of a hand, the protective profile covers the whole door frame. No need for any additional fixing.

NMC Door Frame Protection is also available as certified flame-resistant foam.

## NOMA®PROTECT TPRO:

NOMA®PROTECT TEMPORARY PROTECTION 114 x 13/2 m is a solution specially designed to protect larger stair posts and door frames during construction, renovation or home-moving. Thanks to its flexibility, this pre-slit profile can be easily fixed.




# NOMAPACK® U TULIP STRETCH

The „original“ – proven profile with patented stretch system for widths up to 160 mm.

**LENGTH** 2.000 mm  $\pm 30$  mm

**MATERIAL** Blue PE-LD Foam – Recyclable



Type	A mm	B mm	C mm	D mm	m/	Item Code
------	---------	---------	---------	---------	----	-----------

100-120	120-160	21 $\pm 2$	100-140	80 $\pm 3$	44	3002290
---------	---------	------------	---------	------------	----	---------


m <sup>3</sup> / = 0,50		2040 * 590 * 390 mm			
-------------------------	--	---------------------	--	--	--

# TEMPORARY PROTECTION

The easy to fix protection for door and window frames, delivered as pre-slit profile.

**LENGTH** 2.000 mm  $\pm 30$  mm

**MATERIAL** Red PE-LD Foam – Recyclable



Type	A mm	B mm	m/	Item Code
------	---------	---------	----	-----------

114 x 13	114 $+6/-0$	13 $\pm 1$	22	3003074
----------	-------------	------------	----	---------

m <sup>3</sup> / = 0,50		2040 * 590 * 390 mm		
-------------------------	--	---------------------	--	--

# TEMPORARY WINDOW FRAME PROTECTION

Profiles in various shapes and sizes, made of resistant polyethylene foam, are available to protect window frames and sills. Thanks to their very high clamping force, they stick to every window frame and sill without any additional fixing needed. Cut to size on-site, the profiles fit every angle. The most efficient solution to avoiding damage and costly repairs, for example to sensitive natural stone window sills.

## **NOMAPACK® C BTH**


The innovative protective profile for sensitive window sill edges and corners. NOMAPACK® C BTH profiles are easily installable thanks to their shape, clamping onto a window sill, whatever its shape.

## **NOMAPACK® U**

The NOMAPACK® U-range consists of effective protection profiles for edges and curves of all types. Thanks to the various dimensions and thicknesses you'll always find suitable protection for window frames and sills at your building site.

## **NOMA®PROTECT TPRO**

NOMA®PROTECT TEMPORARY PROTECTION 114 x 13/2 m is a solution specially designed to protect larger stair posts and door frames during construction, renovation or home-moving. Thanks to its flexibility, this pre-slit profile can be easily fixed.

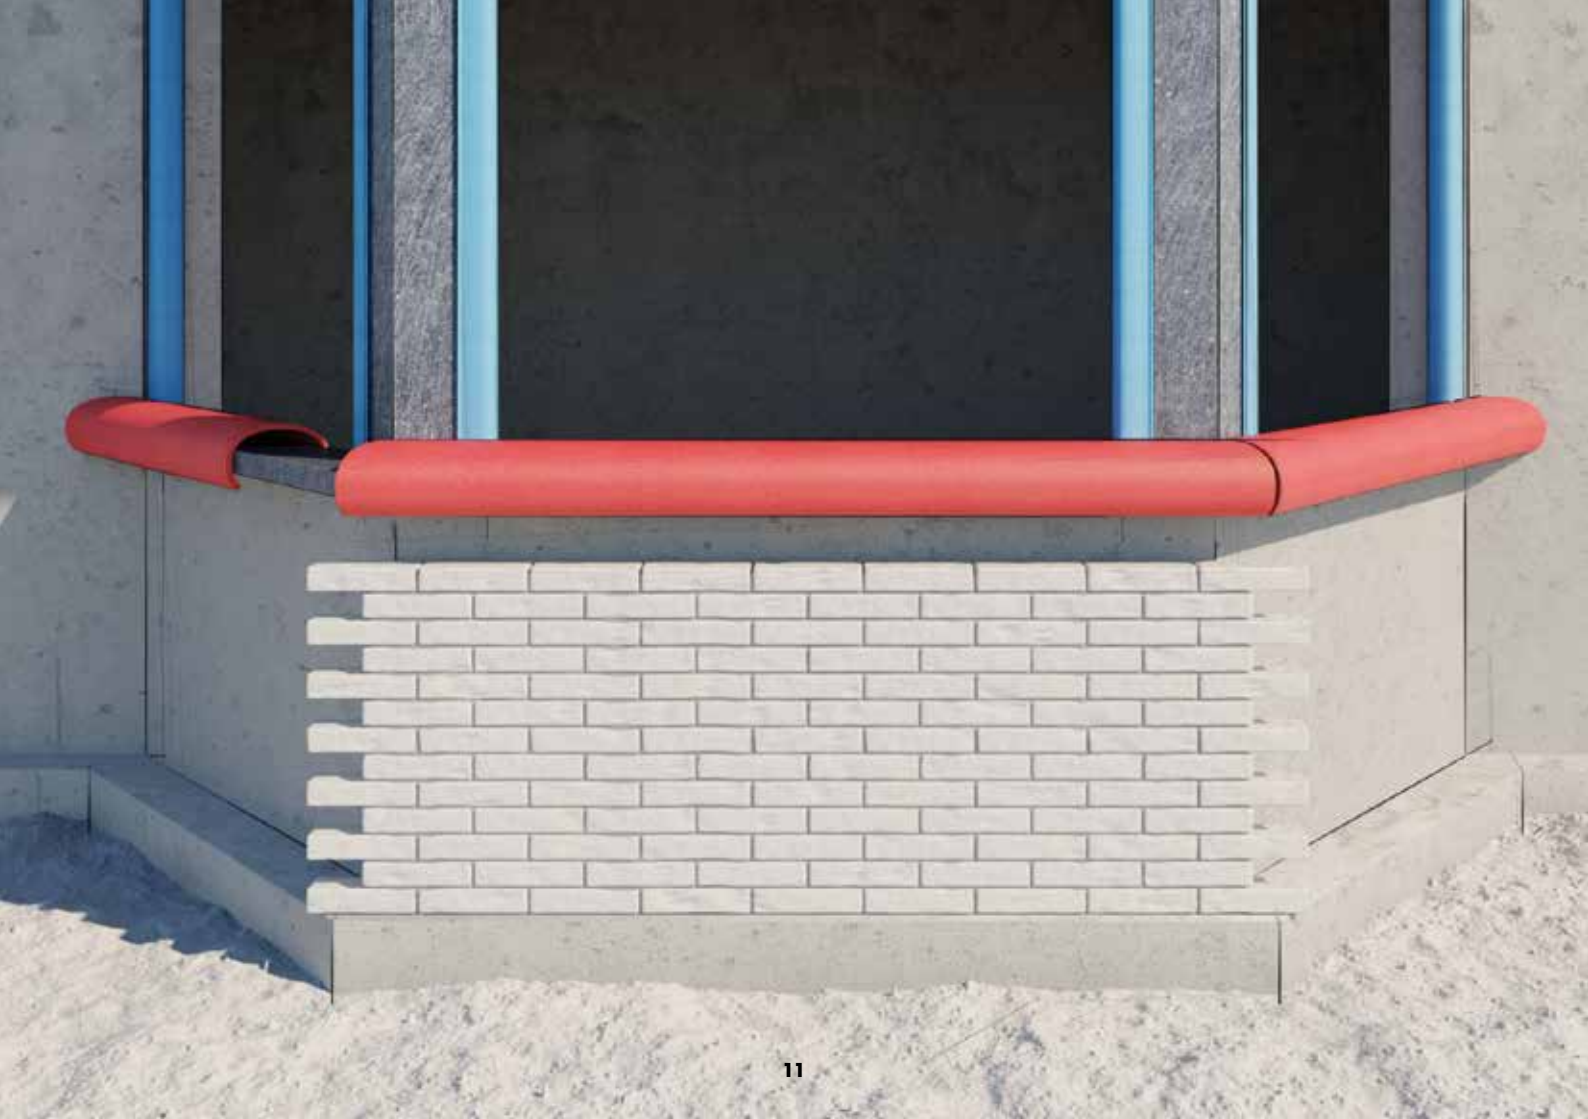


# TEMPORARY PROTECTION

The easy to fix protection for door and window frames, delivered as pre-slit profile.

**LENGTH** 2.000 mm  $\pm 30$  mm

**MATERIAL** Red PE-LD Foam – Recyclable




Type	A mm	B mm	m/	Item Code
114 x 13	114 $\pm 6$ /0	13 $\pm 1$	22	3003074
m <sup>3</sup> / = 0,50     2040 * 590 * 390 mm				

# NOMAPACK® U TULIP

The „original“, proven and reliable profile.

**LENGTH** 2.000 mm  $\pm 30$  mm

**MATERIAL** Blue PE-LD Foam – Recyclable



Type	A mm	B mm	C mm	D mm	m/	Item Code
45-60	57 $\pm 2$	14 $\pm 1$	30 $\pm 5$	60 $\pm 2$	100	3002267
m <sup>3</sup> / = 0,50     2040 * 590 * 390 mm						


# NOMAPACK®


## C BTH



The total protection for sensitive edges.

LENGTH 2.000 mm  $\pm 30$  mm

MATERIAL Blue PE-LD Foam – Recyclable



Type	A mm	D mm	E mm	m/ 	Item Code
BTH	34 $\pm 1$	74 $\pm 4$	5,5 $\pm 1$	120	3002205

 = 0,50       2040 \* 590 \* 390 mm





## **TEMPORARY CORNER PROTECTION**


Right-angled edges and corners are particularly susceptible to being damaged by falling objects or by bumps. NOMAPACK® L-profiles provide perfect protection for all right-angled edges and corners: door openings, worktop edges, wall corners, tiled staircase edges, etc. The L-profiles are simply pressed onto the edges. They can be removed just as simply, and they are reusable. They are available with or without glue.

# NOMAPACK® L

Fast, inexpensive and reliable protection.

**LENGTH** 2.000 mm  $\pm 30$  mm

**MATERIAL** Blue PE-LD Foam – Recyclable

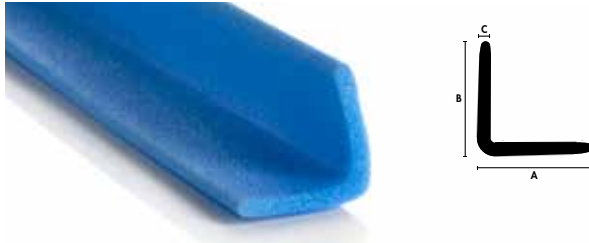

Type	A mm	B mm	C mm	m/	Item Code
75 x 75 - 10	75 $\pm 3$	75 $\pm 3$	10 $\pm 1$	210	3002210
m <sup>3</sup> / = 0,50     2040 * 590 * 390 mm					

# NOMAPACK® L HMR

The profile with residue-free removable adhesive (white release).

**LENGTH** 2.000 mm  $\pm 30$  mm

**MATERIAL** Blue PE-LD Foam – Recyclable




Type	A mm	B mm	C mm	m/	Item Code
75 x 75 - 10 HMR	75 $\pm 3$	75 $\pm 3$	10 $\pm 1$	210	3002211
m <sup>3</sup> / = 0,50     2040 * 590 * 390 mm					

# TEMPO. 0 54 x 20/2480mm

A high-visibility colour profile delivered as pre-slit.

LENGTH 2.480 mm  $\pm 40$  mm

MATERIAL Red PE-LD Foam – Recyclable



Type	A mm	B mm	m/	Item Code
54-20	54 $\pm 2$	20 $\pm 1$	60	3003089


m<sup>3</sup>/ = 0,50    2040 \* 590 \* 390 mm

# TEMPO. 0 50 x 14/2m

A high-visibility colour profile delivered as pre-slit.

LENGTH 2.000 mm  $\pm 20$  mm

MATERIAL Yellow PE-LD Foam – Recyclable



Type	A mm	B mm	m/	Item Code
50-14	50 $\pm 5$	14 $\pm 3$	70	3003892

m<sup>3</sup>/ = 0,50    2040 \* 590 \* 390 mm



# SCAFFOLDING

Foam profiles from the NMC Temporary Protection series are used to protect pedestrians and workers from hurting themselves on scaffolding erected in public spaces. The pre-slit profiles are just pushed over the scaffolding posts. They are made in high-vis colours, giving pedestrians advance warning. Should the latter nevertheless bump into the scaffolding, the foam will act as a shock-absorber, protecting them from bad head injuries and other harm.

## WE ACT RESPONSIBLY

As a family owned and run business, NMC has always been aware of its responsibility for future generations. This awareness of energy efficiency, sustainability and climate protection in turn means that every single step in the development, production and distribution of NMC TECHNICAL FOAMS is checked and optimized for environmental compatibility:

- › Energy consumption from own photovoltaic system covering 21 % of the site's electricity needs and based on 100% green energy
- › In house recycling, where thanks to clever solutions almost 100 % of production waste is reused in a closed cycle
- › Minimised water consumption generated by closed circuits
- › Certified by ISO 14001 – the international standard for environmental management systems

*We consider sustainability in the long run  
as the basic principle of our actions*

*We work for future generations and encourage others, business  
partners and collaborators, to do the same.*



**NMC sa**

Gert-Noël-Strasse · B-4731 Eynatten

☎ +32 87 85 85 00 · 📠 +32 87 85 85 11

info@nmc.eu



[www.nmc-nomafoam.com](http://www.nmc-nomafoam.com)