




TECHNICAL DATA SHEET

NOMATEC® ROOF SEAL

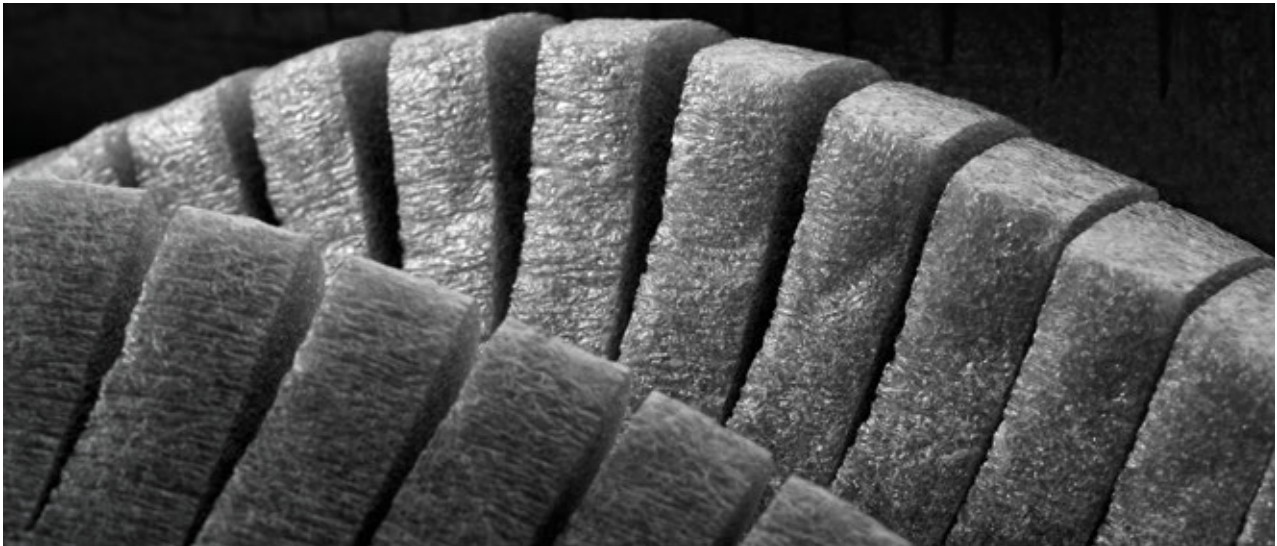

NOMATEC® Roof Seal are self adhesive profiles with open cell PE foam specially designed to seal the roof area. Thanks to their unique cut profile, they adapt themselves to nearly every roof shape and reliably fill gaps and fugues.

FOAM:

- > Non cross-linked PE-LD
- > Open cells with skin
- > Colour: grey
- > Storage conditions: not exposed to UV

GLUE:

- > Hotmelt PSA
- > Colour: transparent / yellow
- > Recommended application temperature: > 5 °C
- > Usage temperature: 5 – 50 °C

STORAGE CONDITIONS

- > Free from UV
- > Storage temperature: 5-35°C
- > Dry and dust free
- > Maximum 1 year from production date






TECHNICAL DATA SHEET

NOMATEC® ROOF SEAL

Colour	Grey
Packaging	length on coil
Coils on pallet	4
Features	<ul style="list-style-type: none"> > Seals gaps in the roof area > Flexible, preslit profile > Self-adhesive > Available in 40 and 50 mm height (B) > Storage conditions: free from UV, dry and dust free, at temperature between 5 and 35 °C




Type	A	B	C	D	E	Length	Packaging unit	Item code
	mm	mm	mm	mm	mm	m	m/Roll	
25 x 40	25 ±2	40 ±2,5	20 ±2	10 ±1	25 ±2	350 ±2%	350	3006528
25 x 50	25 ±2	50 ±2,5	18 ±2	10 ±1	25 ±2	300 ±2%	300	3006530

m³/roll = 0,70 roll 1200 * 460 mm

ALSO IN OUR RANGE



NOMATEC® BACKER ROD HOLLOW & FULL
 NOMATEC® Backer Rod Hollow & Full round profiles are manufactured from closed-cell polyethylene foam and are used as backing material for elastomeric and other cold-applied sealants. They are inserted into a joint to control the sealant depth and act as bond-breakers, without adhering to the sealant.

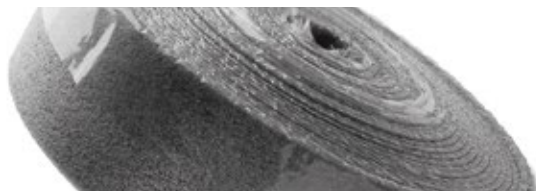

NOMATEC® RDS
 NOMATEC® RDS are edge insulation and expansion joints, in closed cell PE foam, for cement floor and floor heating systems.



NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.



NMC sa

Gert-Noël-Strasse · B-4731 Eynatten

☎ +32 87 85 85 00 · 📠 +32 87 85 85 11

✉ info@nmc.eu



www.nmc-nomafoam.com