

NOMAPACK® L

NOMAPACK® L provides reliable protection for corners and edges made of glass, wood, plastic or metal.

- » Available in various lengths and thicknesses
- » With or without adhesive

PRODUCT FEATURES:

- » PE-LD foam
- » Supplied as lengths
- » Water absorption
< 1 – vol.% after 40 days
- » Recyclable

APPLICATIONS:

- » Corners and edges
- » Narrow and scratch-sensitive goods
- » Can be used in shrinking tunnels

**THE RELIABLE
PROTECTION
FOR CORNERS
AND EDGES**



ENSURE YOUR **VALUABLE GOODS** ARRIVE IN **PERFECT CONDITION**

nmc

NOMAPACK®



L

Fast, inexpensive and reliable protection.

COLOUR
Standard blue

LENGTH
2.000 ±30 mm

PACKAGING
Lengths in boxes

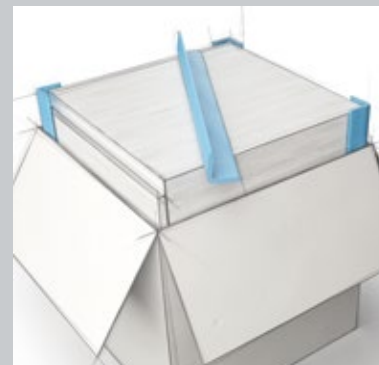

Type	A mm	B mm	C mm	Packaging unit m	Item code
50 x 50 - 6	50 ±2	50 ±2	6 ±1	480	3002207
75 x 75 - 10	75 ±3	75 ±3	10 ±1	210	3002210
m³/ = 0,50		2040 * 590 * 390 mm		4 on pallet	

NOMAPACK®


L HMR

The profile with residue-free removable adhesive (white release).

COLOUR
Standard blue

LENGTH
2.000 ±30 mm

PACKAGING
Lengths in boxes




Type	A mm	B mm	C mm	Packaging unit m	Item code
50 x 50 - 6 HMR*	50 ±2	50 ±2	6 ±1	480	3002208
75 x 75 - 10 HMR*	75 ±3	75 ±3	10 ±1	210	3002211
m³/ = 0,50		2040 * 590 * 390 mm		4 on pallet	

NOMAPACK®

L 135x67-10/70 HMP

The easy to fix profile with permanent adhesive.



COLOUR
Standard blue

LENGTH
70 ±10 mm

PACKAGING
Pieces in boxes



Type	A mm	B mm	C mm	D mm	E mm	F mm	Packaging unit pcs	Item code
L 135 x 67 HMP**	135 ±4	63 ±2	10 ±1	17 ±1,5	29	40	1200	3008999
m³/ = 0,66		1190 * 790 * 700 mm		3 on pallet				

Glue storage conditions: away from UV • Storage T°: 5-35 °C • Dry and dust free • 1 year from production date

We recommend the adequate tests be made in your laboratory, plant or otherwise to determine if this product meets all your specific requirements. The utilization of the goods shall thus be at the purchaser's own risk. The seller should refuse any responsibility regarding his intervention for direct and/or indirect damage potentially arising from this particular use. Only in case of product default, the seller shall not be liable for damages in excess of the purchase price of the product.

NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.


*HMR = removable adhesive **HMP = permanent adhesive

Marked profiles are manufactured with at least 30% recycled material

Marked profiles contain at least 35% PCR material

NOMAPACK®
L 65x65-10


The easy to fix Rim Profile.



COLOUR
Standard blue

LENGTH
Welded ring suited for
16" to 19" rims

PACKAGING
Pieces in boxes

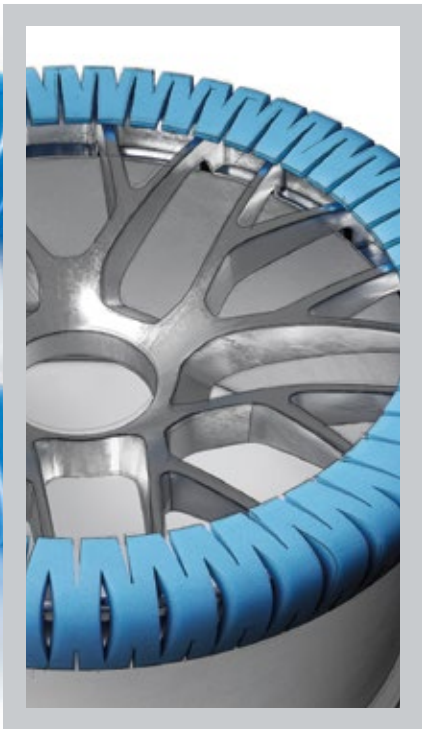

Type	A mm	B mm	C mm	Packaging unit pcs	Item code
L 65 x 65 - 10*	65 ±5	65 ±5	10 ±2	60	3037217
m³/ = 0,27	785 * 585 * 585 mm			8 on pallet	

