




NOMATEC®

www.nmc-nomafoam.com

PRODUCT SPECIFICATION


NOMATEC® DAMPING STRIP

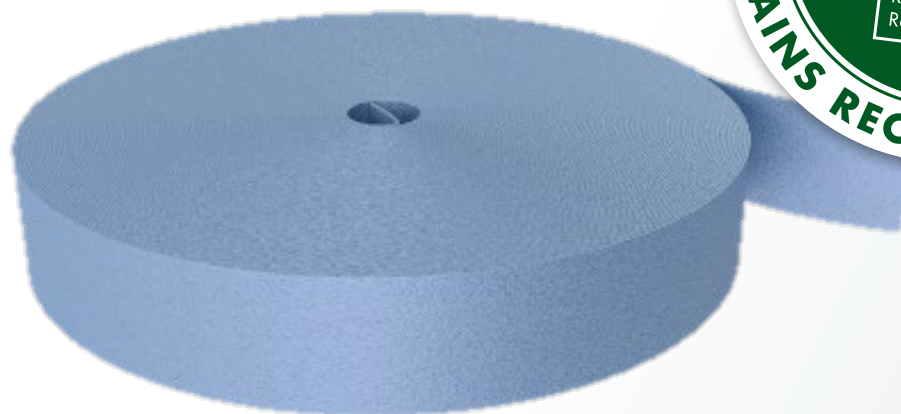

NOMATEC® Damping strip consists of an extruded age-resistant polyethylene foam with closed cells. The profile is used when installing sheet metal roofs on battens and acts as a damping strip to reduce the noise that can be caused by wind and rain. The profile is mounted below each plate at the center of the plate. The damping strip must start from the second lowest batten and stop at the next highest batten.

PRODUCT FEATURES

- › Extruded non-crosslinked polyethylene foam (LDPE)
- › Fine cell structure gives outstanding physical properties
- › Age resistance > 50 years
- › Colour: blue
- › 100% recyclable

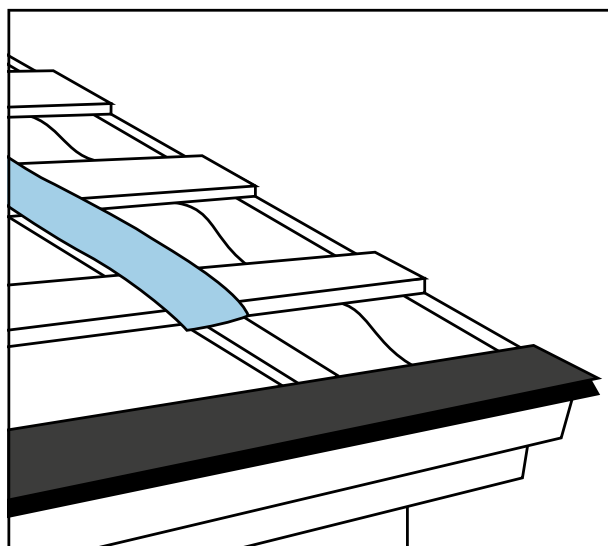



PRODUCT SPECIFICATION

NOMATEC® DAMPING STRIP

Type	Width mm	Thickness mm	Length m	Density kg/m ³	m/bag	m ³ /bag	Item Code
45 x 4 mm x 100 m	45	4	100	30 ± 2		0,31	3014582
45 x 4 mm x 300 m	45	4	300	30 ± 2		0,22	3014583
65 x 4 mm x 300 m	65	4	300	30 ± 2		0,23	3014584
70 x 4 mm x 100 m	70	4	100	30 ± 2		0,60	3014587
70 x 4 mm x 300 m	70	4	300	30 ± 2		0,22	3014588
95 x 4 mm x 100 m	95	4	100	30 ± 2		0,60	3014593
95 x 4 mm x 300 m	95	4	300	30 ± 2		0,21	3014594
120 x 4 mm x 100 m	120	4	100	30 ± 2		0,60	3014599
120 x 4 mm x 300 m	120	4	300	30 ± 2		0,21	3014600
145 x 4 mm x 100 m	145	4	100	30 ± 2		0,60	3014605
145 x 4 mm x 300 m	145	4	300	30 ± 2		0,21	3014606
195 x 4 mm x 300 m	195	4	300	30 ± 2		0,21	3014616

NMC Sverige AB

Stenstorpsvägen 35
SE – 305 75 Getinge
☎ +46 35 588 00
info@nmc.se



www.nmc-nomafoam.com