

NOMAPACK® PAD

NOMAPACK® PAD is a spacer available in various dimensions. It is used for separating, supporting and securing sensitive goods during storage, transport and handling. The pads are pre punched, allowing sections to be separated cleanly to the required length. They are available with either low tack or permanent adhesive.

PRODUCT FEATURES:

- » Manufactured from polyethylene (PE LD) foam
- » Water absorption: < 1 – vol.% after 40 days
- » Supplied as lengths with break off perforation

APPLICATIONS:

- » Cushioning
- » Spacing
- » Securing

RECYCLING INFORMATION: This product can only be processed in specific polyethylene (PE LD) recycling systems where suitable collection, sorting and recycling infrastructure is available. Such systems are not widely established and their availability varies by region. Whether recycling is possible therefore depends on local waste management capabilities.

**COMPACT
PACKAGING PAD
FOR SEPARATING
AND FIXING**




ENSURE YOUR **VALUABLE GOODS** ARRIVE IN **PERFECT CONDITION**

nmc

NOMAPACK® PAD


Spacer available with either low tack (HMR) or permanent (HMP) adhesive.
NOMAPACK® PAD is designed for applications involving mechanical loads.



COLOUR
Standard blue

LENGTH
1.150 ±20 mm

PACKAGING
Pieces in boxes

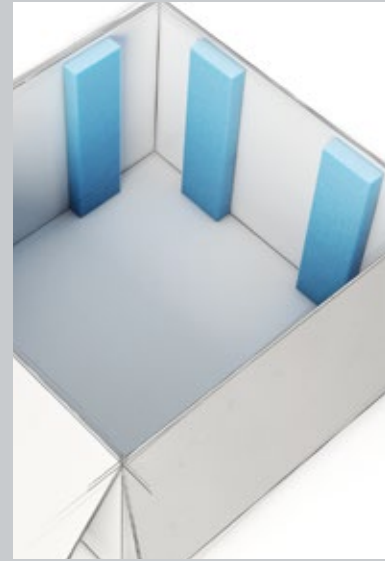

Type		A mm	B mm	C mm	Packaging unit pcs	Packaging unit* m	Item code
Removable adhesive (white Release)							
50 x 10 HMR		50 ±3	10 ±2	50 ±8**	16.100	805	3002213
50 x 20 HMR		50 ±3	20 ±2	50 ±8**	10.350	518	3002215
50 x 50 HMR		50 ±3	50 ±3	50 ±8	4.025	201	3002232
65 x 25 HMR		65 ±3	25 ±2	64 ±8	4.950	317	3002219
100 x 25 HMR		100 ±3	25 ±2	96 ±8	2.160	207	3002220
100 x 50 HMR		100 ±3	50 ±3	96 ±8	1.176	113	3011417
Permanent adhesive (transparent Release)							
50 x 10 HMP		50 ±3	10 ±2	50 ±8**	16.100	805	3002214
50 x 20 HMP		50 ±3	20 ±2	50 ±8**	10.350	518	3002216
50 x 50 HMP		50 ±3	50 ±3	50 ±8	4.025	201	3002235
65 x 25 HMP		65 ±3	25 ±2	64 ±8	4.950	317	3002223
100 x 25 HMP		100 ±3	25 ±2	96 ±8	2.160	207	3002224
100 x 50 HMP		100 ±3	50 ±3	96 ±8	1.176	113	3011418
m³/ = 0,68		1190 * 790 * 700 mm		3 on pallet			




Glue storage conditions: away from UV • Storage T°: 10-40 °C • Dry and dust free • Maximum storage period: 1 year from production date

It is recommended to perform appropriate tests under actual operating conditions and within the respective production and application environments to verify the suitability of the product for the intended requirements. Responsibility for product selection and use lies solely with the purchaser. The seller assumes no liability for direct or indirect damages resulting from the specific application. Liability exceeding the purchase price of the product is excluded.

NOMAPACK® PAD HALFMOON

Spacer with half moon shape, available with low tack (D) or permanent (P) adhesive.



COLOUR
Standard blue

LENGTH
1.000 ±20 mm

PACKAGING
Pieces in boxes




Type	A mm	B mm	Packaging unit pcs	Packaging unit m	Item code
Removable adhesive tape (white Release)					
30 40 D	42 ±1	50	2.000	100	3002225
30 50 D	51 ±2	50	1.200	60	3002229
30 60 D	58 ±2	50	1.000	50	3002236
Permanent adhesive tape (yellow Release)					
30 40 P	42 ±1	50	2.000	100	3002228
30 50 P	51 ±2	50	1.200	60	3002233
30 60 P	58 ±2	50	1.000	50	3002237
m ³ /☐ = 0,25		☐ 1020 * 600 * 400 mm		8 ☐ on pallet	



NOMAPACK® PAD 25 mm

Spacer available with low tack (D) or permanent (P) adhesive.



COLOUR
Standard blue

LENGTH
1.000 ±20 mm

PACKAGING
Pieces in boxes



Type	A mm	B mm	C mm	D mm	Packaging unit pcs	Packaging unit m	Item code
Removable adhesive tape (white Release)							
25/1m D 50 mm	55 ±4	41 ±2	25 ±2	50 ±5	3.200	160	3002217
Permanent adhesive tape (yellow Release)							
25/1m P 50 mm	55 ±4	41 ±2	25 ±2	50 ±5	3.200	160	3002222
m ³ /☐ = 0,25		☐ 1020 * 590 * 390 mm		8 ☐ on pallet			



Glue storage conditions: away from UV • Storage T°: 10-40 °C • Dry and dust free • Maximum storage period: 1 year from production date

It is recommended to perform appropriate tests under actual operating conditions and within the respective production and application environments to verify the suitability of the product for the intended requirements. Responsibility for product selection and use lies solely with the purchaser. The seller assumes no liability for direct or indirect damages resulting from the specific application. Liability exceeding the purchase price of the product is excluded.

NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.